

Registration No. :

--	--	--	--	--	--	--	--	--	--

Total number of printed pages – 3

B. Tech
PCEI 4303 (New)

Sixth Semester (Back) Examination – 2013

CONTROL SYSTEMS

BRANCH : AEIE, BIOMED, IEE

QUESTION CODE : B241

Full Marks – 70

Time : 3 Hours

Answer Question No. 1 which is compulsory and any **five** from the rest.
The figures in the right-hand margin indicate marks.

1. Answer the following questions : 2 × 10
- (a) Differentiate between linear time-invariant and non-linear, time-variant systems.
- (b) Define transfer function and impulse response of a system.
- (c) The response $c(t)$ of a system is described by the differential equation

$$\frac{d^2c(t)}{dt^2} + 4 \frac{dc(t)}{dt} + 5c(t) = 0$$


Determine whether the system response is undamped, underdamped, overdamped, or critically damped.

- (d) First column elements of the Routh's tabulation are 3, 5, $-3/4$, $1/2$, 2. How many roots of the characteristic equation lie on the right hand side of the s-plane ?
- (e) Define the various static error constants.
- (f) What is the slope of the log-magnitude curve in the low-frequency region of a type '1' system ?
- (g) Define gain crossover frequency and phase cross over frequency.
- (h) State Nyquist Stability criteria for a system which is both closed loop and open loop stable. Is it possible to stabilize an open loop unstable system by closing the loop ?



P.T.O.

- (i) What is the utility of an integral controller ?
- (j) What is the State Transition Matrix ? Enumerate its properties.
2. (a) Draw the block diagram of an armature-controlled dc servomotor and determine its transfer function. 5
- (b) Linearize the non-linear equation $z = xy$ in the region $5 \leq x \leq 7, 10 \leq y \leq 12$. Find the error if the linearized equation is used to calculate the value of z when $x = 5, y = 10$. 5
3. (a) Derive the expressions for rise time, peak time and peak overshoot of the response of a second order system to unit step input. 5
- (b) Determine the value of gain K for the system whose closed loop transfer function is $T(s) = \frac{K}{s^2 + 5s + K}$. The response of the system for a unit step input will have 10% overshoot. 5
4. Consider the closed loop feedback system shown in the figure below. 10

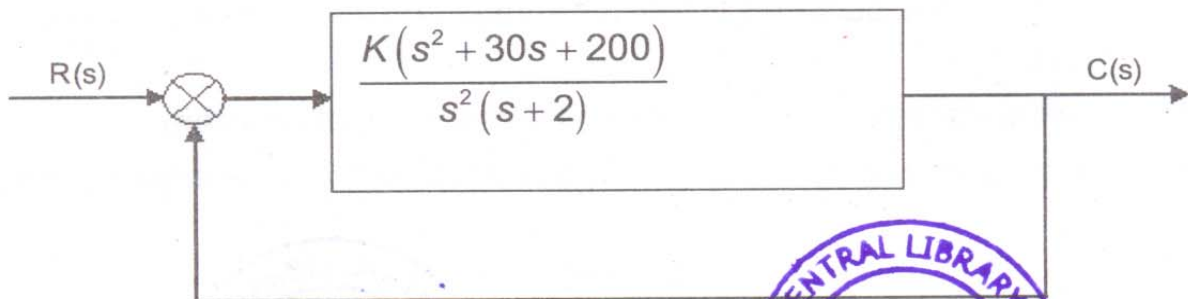

Using Routh-Hurwitz criterion, determine the range of K for which the system is stable. Find also the number of roots of the characteristic equation that are in the right half of the s -plane for $K = 0.5$.

5. (a) A closed loop system is described by $G(s)H(s) = \frac{K}{s(1+sT_1)(1+sT_2)}$. Determine the gain margin of the system for $K = 1, T_1 = 1, T_2 = 1/3$. 5
- (b) Sketch the Polar plot for the system having open loop transfer function $G(s) = \frac{1}{s(Ts + 1)}$. How is a polar plot modified when a pole at the origin is added to the original transfer function ? 5

6. (a) Using Nyquist plot, examine the stability of the closed loop system with

$$G(s)H(s) = \frac{s+2}{(s+1)(s-1)} \quad 5$$

- (b) Consider a feedback system with characteristic equation

$$1 + K \frac{1}{s(s+1)(s+2)} = 0$$

How many branches of the root locus move to infinity and in which direction? Determine the centroid of the asymptotes. 5

7. (a) Obtain the transfer function for the system 5

$$\dot{X} = \begin{bmatrix} 1 & 2 \\ -4 & -3 \end{bmatrix} X + \begin{bmatrix} 1 \\ 2 \end{bmatrix} u$$

$$y = [1 \quad 1] X$$

- (b) Consider the system 5

$$\ddot{y} + 6\dot{y} + 11y = 6u$$

Obtain a state-space representation of the system in diagonal canonical form.

8. Write short notes on any **two** : 5×2

- (a) Stepper Motor
- (b) M-circle
- (c) Generalised error series
- (d) Effects of degenerative feedback on control systems.

